

MIRROR WITH PERIMETRICAL LIGHT
art. L45936



TECHNICAL INFORMATION:


It can be mounted horizontally and vertically
The LED's assembled in Italy, are easily replaceable.
230V, Class III, IP44, LED on rigid support 1 x 50 WATT
2900 lumens of natural light color (> 4000K)
CE
Comply with the directives 2006/95 / EC and 2004/108 / EC in terms of electrical safety and electromagnetic compatibility

MATERIALS:


High-quality glass,
thickness 5 mm,
ecological production without lead and copper.
Structure of anodized aluminium

COMPATIBILITY ENERGY:

WARRANTY:

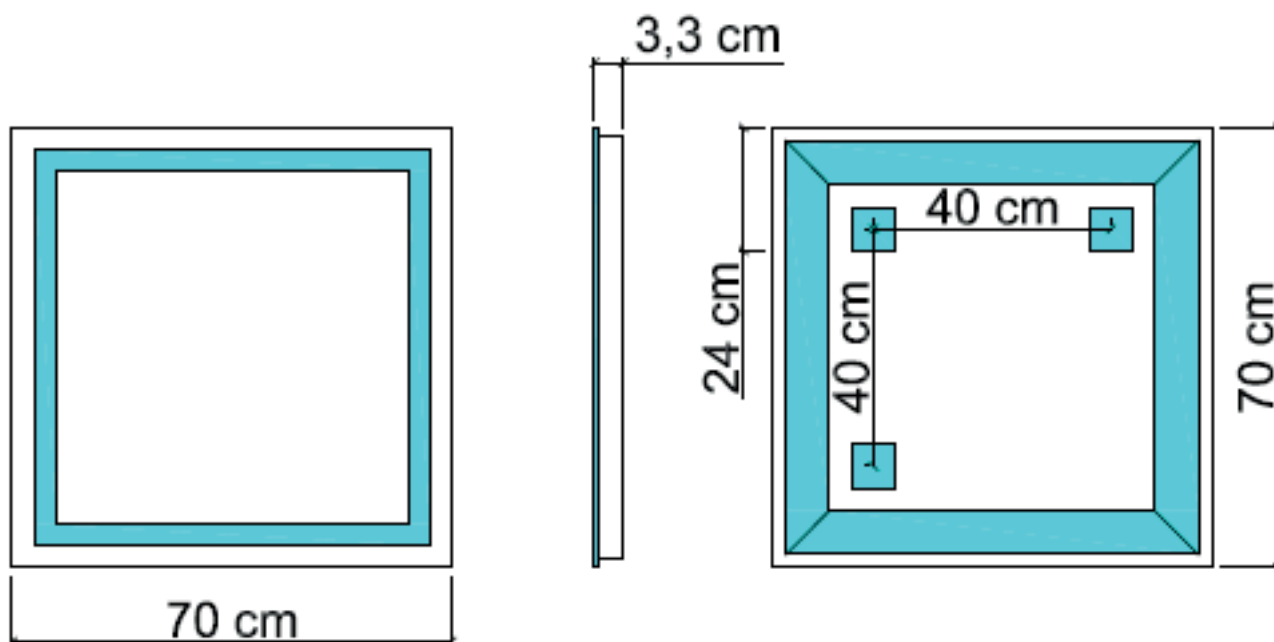

MIRROR WITH PERIMETRICAL LIGHT
art. L45937

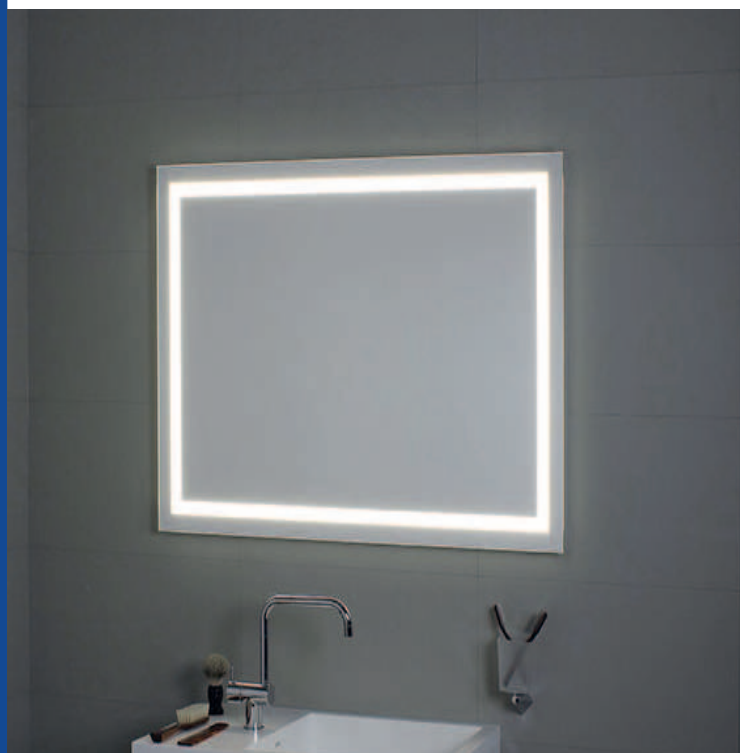

TECHNICAL INFORMATION:

It can be mounted horizontally and vertically
The LED's assembled in Italy, are easily replaceable.
230V, Classelll, IP44, LED on rigid support 1 x 61 WATT
3570 lumens of natural light color (> 4000K)
CE
Comply with the directives 2006/95 / EC and 2004/108 / EC in terms of electrical safety and electromagnetic compatibility


MATERIALS:

High-quality glass,
thickness 5 mm,
ecological production without lead and copper.
Structure of anodized aluminium

COMPATUBILITY ENERGY:



WARRANTY:

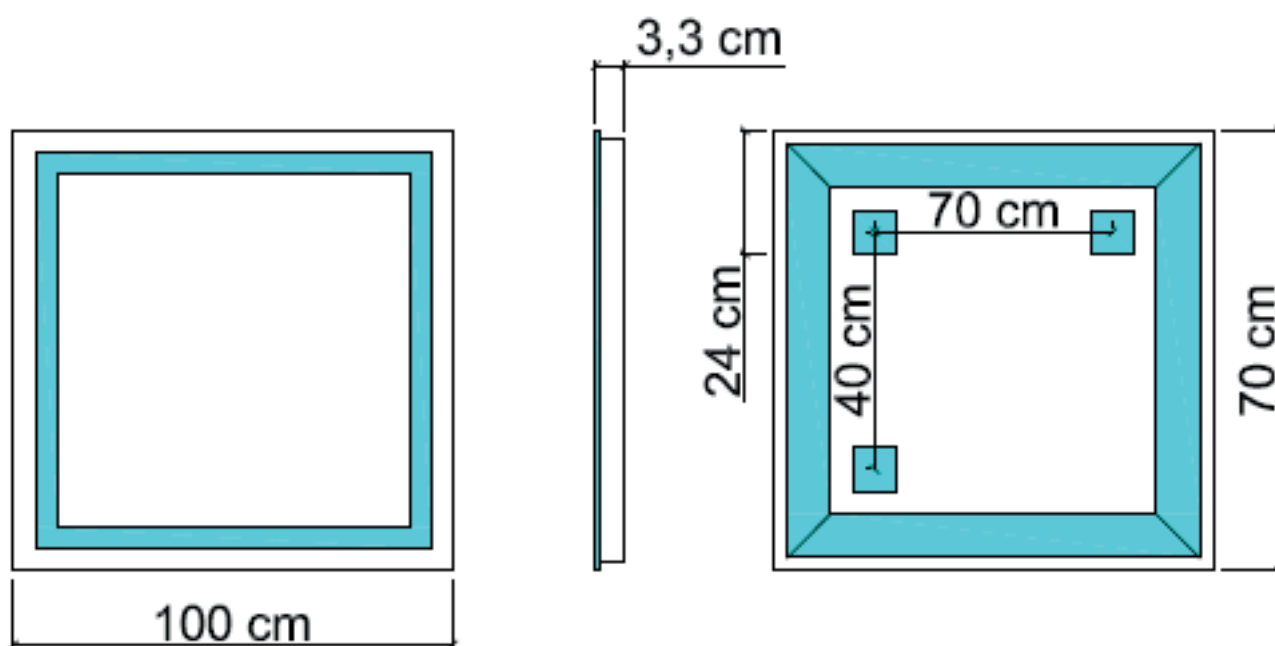

MIRROR WITH PERIMETRICAL LIGHT
art. L45950



TECHNICAL INFORMATION:


It can be mounted horizontally and vertically
The LED's assembled in Italy, are easily replaceable.
230V, Class III, IP44, LED on rigid support 1 x 69 WATT
4050 lumens of natural light color (> 4000K)
CE
Comply with the directives 2006/95 / EC and 2004/108 / EC in terms of electrical safety and electromagnetic compatibility

MATERIALS:

High-quality glass,
thickness 5 mm,
ecological production without lead and copper.
Structure of anodized aluminium

COMPATIBILITY ENERGY:

WARRANTY:

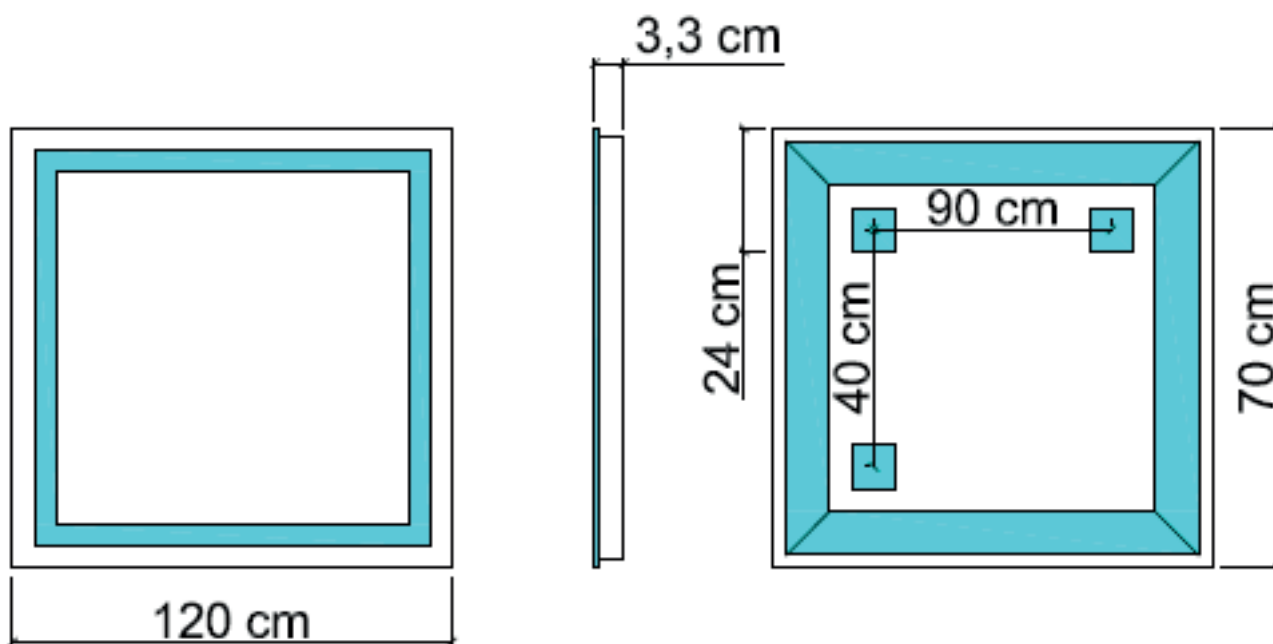

MIRROR WITH PERIMETRICAL LIGHT
art. L45951



TECHNICAL INFORMATION:


It can be mounted horizontally and vertically
The LED's assembled in Italy, are easily replaceable.
230V, Class III, IP44, LED on rigid support 1 x 77 WATT
4500 lumens of natural light color (> 4000K)
CE
Comply with the directives 2006/95 / EC and 2004/108 / EC in terms of electrical safety and electromagnetic compatibility

MATERIALS:

High-quality glass,
thickness 5 mm,
ecological production without lead and copper.
Structure of anodized aluminium

COMPATIBILITY ENERGY:

WARRANTY:

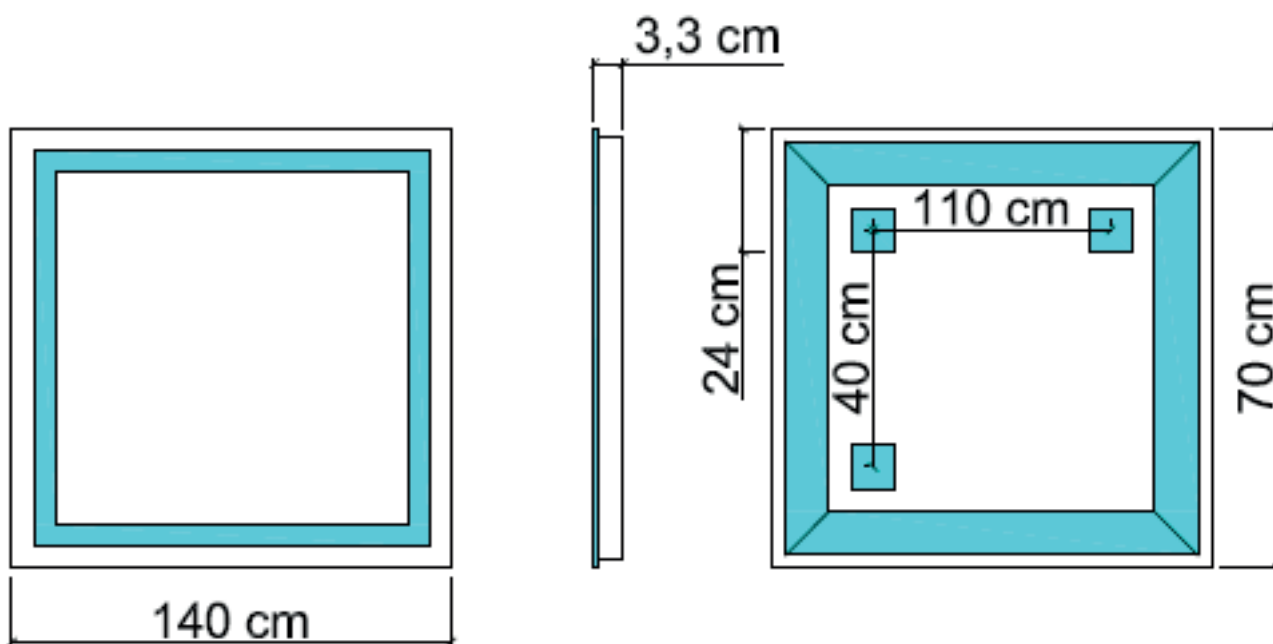

MIRROR WITH PERIMETRICAL LIGHT
art. L45952



TECHNICAL INFORMATION:

It can be mounted horizontally and vertically
The LED's assembled in Italy, are easily replaceable.
230V, Class III, IP44, LED on rigid support 1 x 85 WATT
4970 lumens of natural light color (> 4000K)
CE

Comply with the directives 2006/95 / EC and 2004/108 / EC in terms of electrical safety and electromagnetic compatibility


MATERIALS:

High-quality glass,
thickness 5 mm,
ecological production without lead and copper.
Structure of anodized aluminium

COMPATIBILITY ENERGY:



WARRANTY:

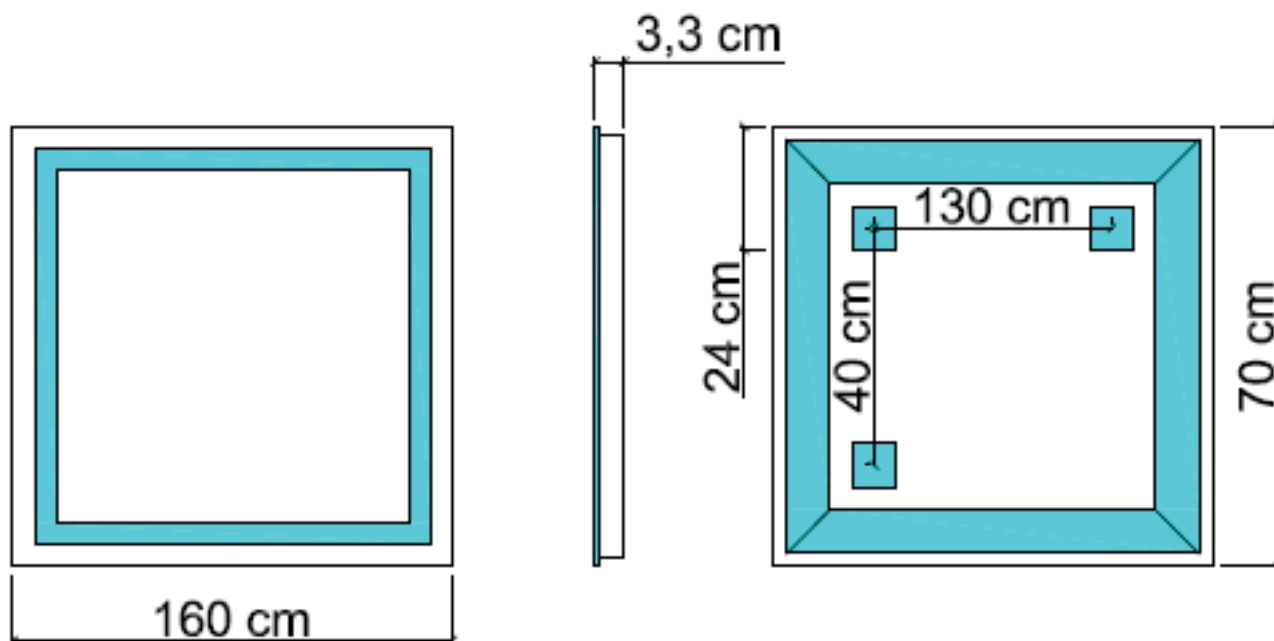

MIRROR WITH PERIMETRICAL LIGHT
art. L45953



TECHNICAL INFORMATION:

It can be mounted horizontally and vertically
The LED's assembled in Italy, are easily replaceable.
230V, ClassIII, IP44, LED on rigid support 1 x 58 WATT
3360 lumens of natural light color (> 4000K)
CE

Comply with the directives 2006/95 / EC and 2004/108 / EC in terms of electrical safety and electromagnetic compatibility


MATERIALS:

High-quality glass,
thickness 5 mm,
ecological production without lead and copper.
Structure of anodized aluminium

COMPATIBILITY ENERGY:



WARRANTY:

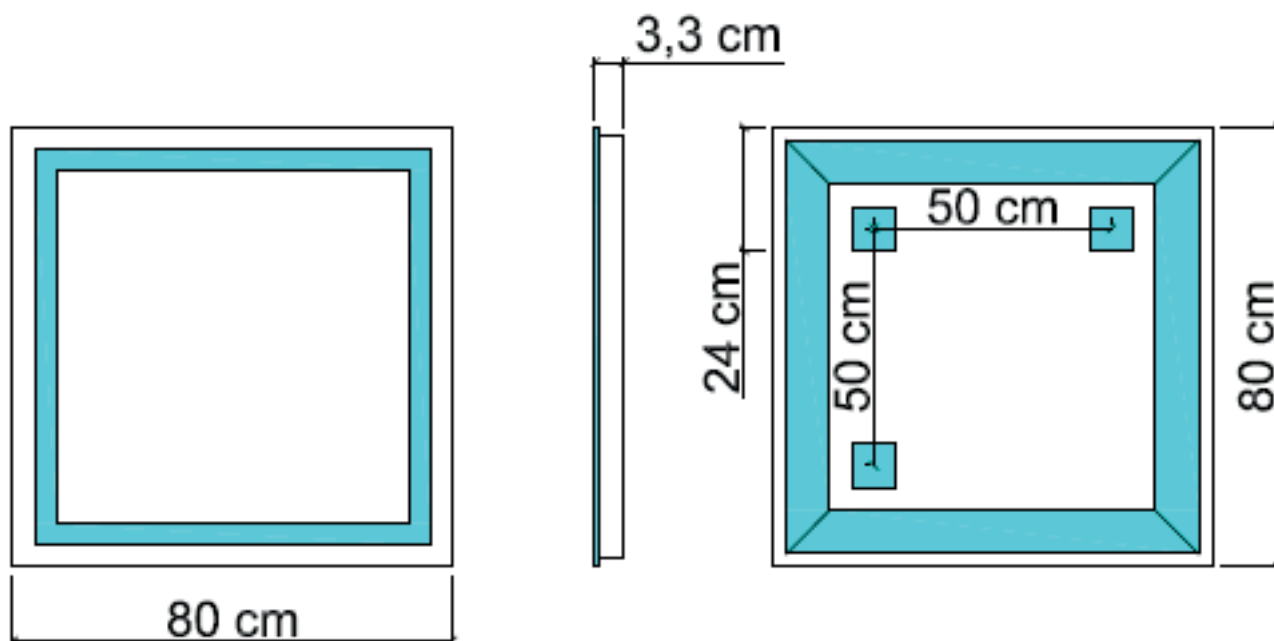

MIRROR WITH PERIMETRICAL LIGHT
art. L45954



TECHNICAL INFORMATION:

It can be mounted horizontally and vertically
The LED's assembled in Italy, are easily replaceable.
230V, Classelll, IP44, LED on rigid support 1 x 65 WATT
3820 lumens of natural light color (> 4000K)
CE

Comply with the directives 2006/95 / EC and 2004/108 / EC in terms of electrical safety and electromagnetic compatibility


MATERIALS:

High-quality glass,
thickness 5 mm,
ecological production without lead and copper.
Structure of anodized aluminium

COMPATUBILITY ENERGY:



WARRANTY:

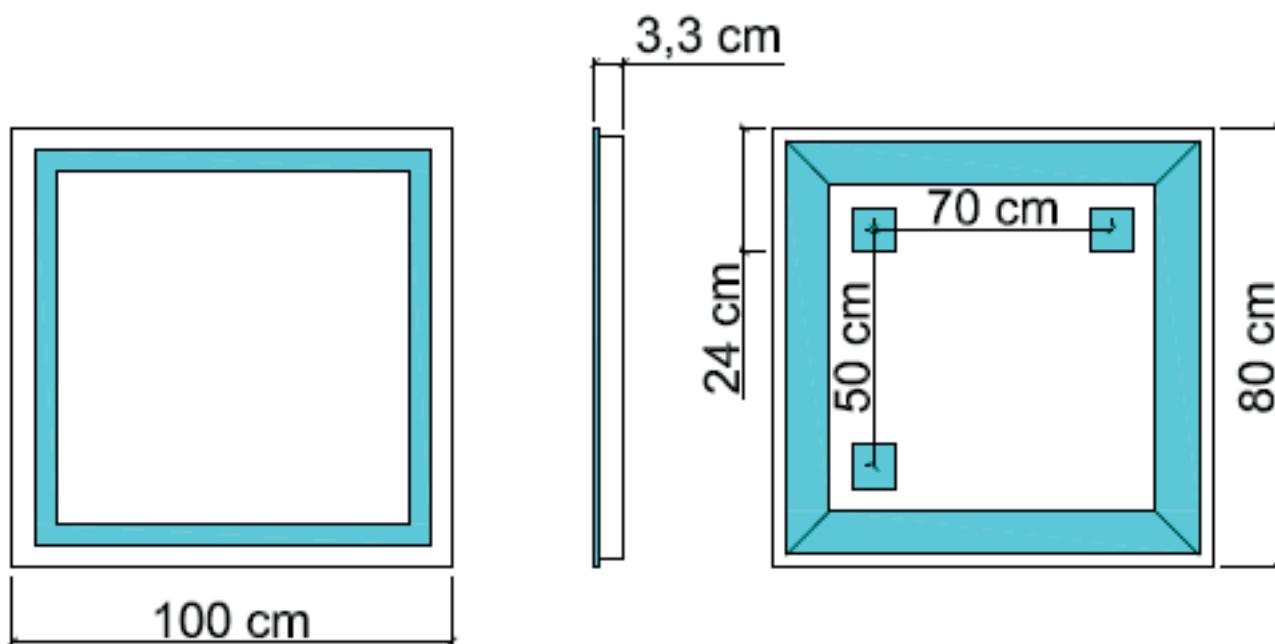

MIRROR WITH PERIMETRICAL LIGHT
art. L45955



TECHNICAL INFORMATION:

It can be mounted horizontally and vertically
The LED's assembled in Italy, are easily replaceable.
230V, Class III, IP44, LED on rigid support 1 x 73 WATT
4280 lumens of natural light color (> 4000K)
CE

Comply with the directives 2006/95 / EC and 2004/108 / EC in terms of electrical safety and electromagnetic compatibility


MATERIALS:

High-quality glass,
thickness 5 mm,
ecological production without lead and copper.
Structure of anodized aluminium

COMPATIBILITY ENERGY:



WARRANTY:

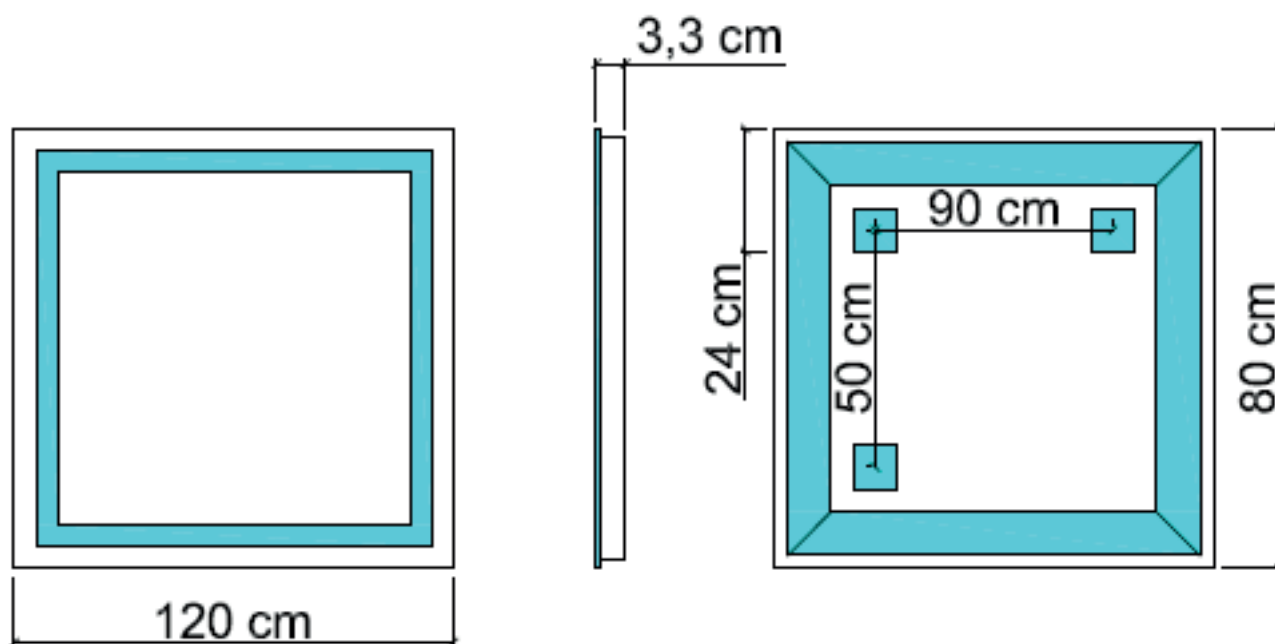

MIRROR WITH PERIMETRICAL LIGHT
art. L45956



TECHNICAL INFORMATION:

It can be mounted horizontally and vertically
The LED's assembled in Italy, are easily replaceable.
230V, Class III, IP44, LED on rigid support 1 x 80 WATT
4740 lumens of natural light color (> 4000K)
CE

Comply with the directives 2006/95 / EC and 2004/108 / EC in terms of electrical safety and electromagnetic compatibility


MATERIALS:

High-quality glass,
thickness 5 mm,
ecological production without lead and copper.
Structure of anodized aluminium

COMPATIBILITY ENERGY:



WARRANTY:

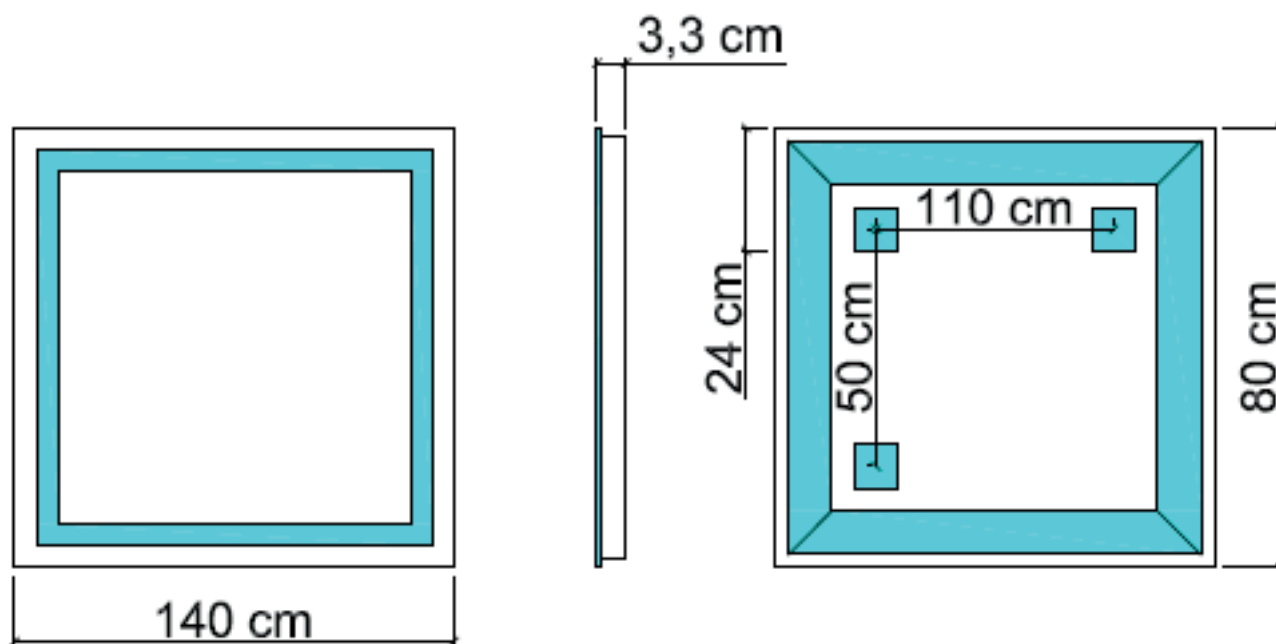

MIRROR WITH PERIMETRICAL LIGHT
art. L45957



TECHNICAL INFORMATION:

It can be mounted horizontally and vertically
The LED's assembled in Italy, are easily replaceable.
230V, Class III, IP44, LED on rigid support 1 x 88 WATT
5200 lumens of natural light color (> 4000K)
CE
Comply with the directives 2006/95 / EC and 2004/108 / EC in terms of electrical safety and electromagnetic compatibility


MATERIALS:

High-quality glass,
thickness 5 mm,
ecological production without lead and copper.
Structure of anodized aluminium


COMPATIBILITY ENERGY:



WARRANTY:

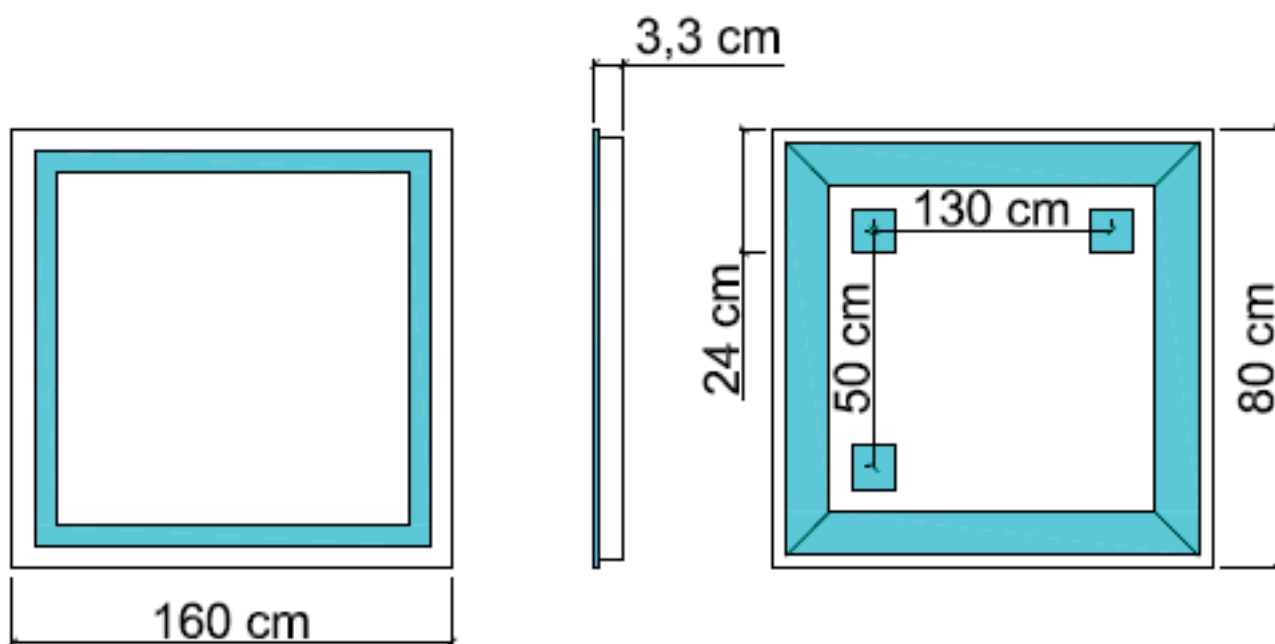

MIRROR WITH PERIMETRICAL LIGHT
art. L45981

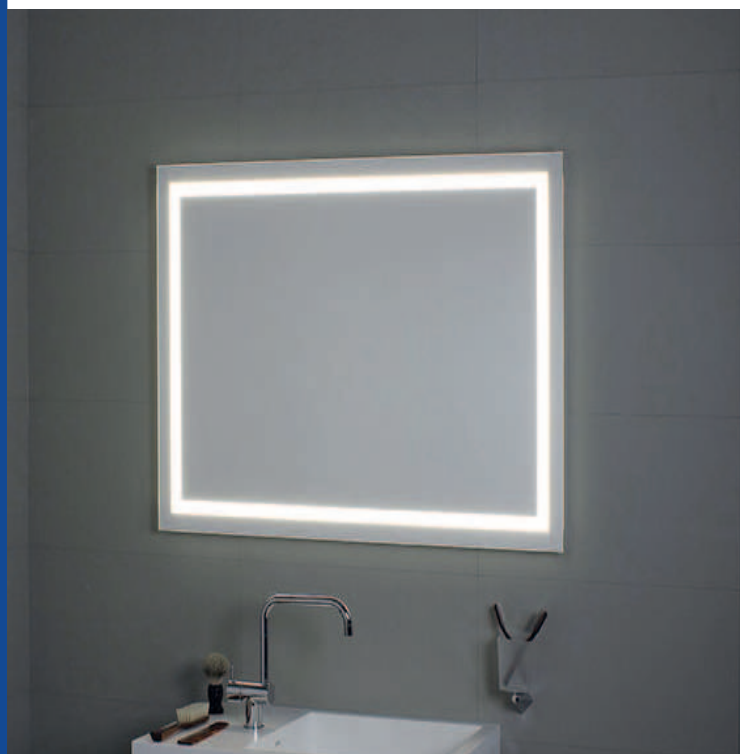

TECHNICAL INFORMATION:


It can be mounted horizontally and vertically
The LED's assembled in Italy, are easily replaceable.
230V, Class III, IP44, LED on rigid support 1 x 53 WATT
3120 lumens of natural light color (> 4000K)
CE
Comply with the directives 2006/95 / EC and 2004/108 / EC in terms of electrical safety and electromagnetic compatibility

MATERIALS:

High-quality glass,
thickness 5 mm,
ecological production without lead and copper.
Structure of anodized aluminium

COMPATIBILITY ENERGY:

WARRANTY:

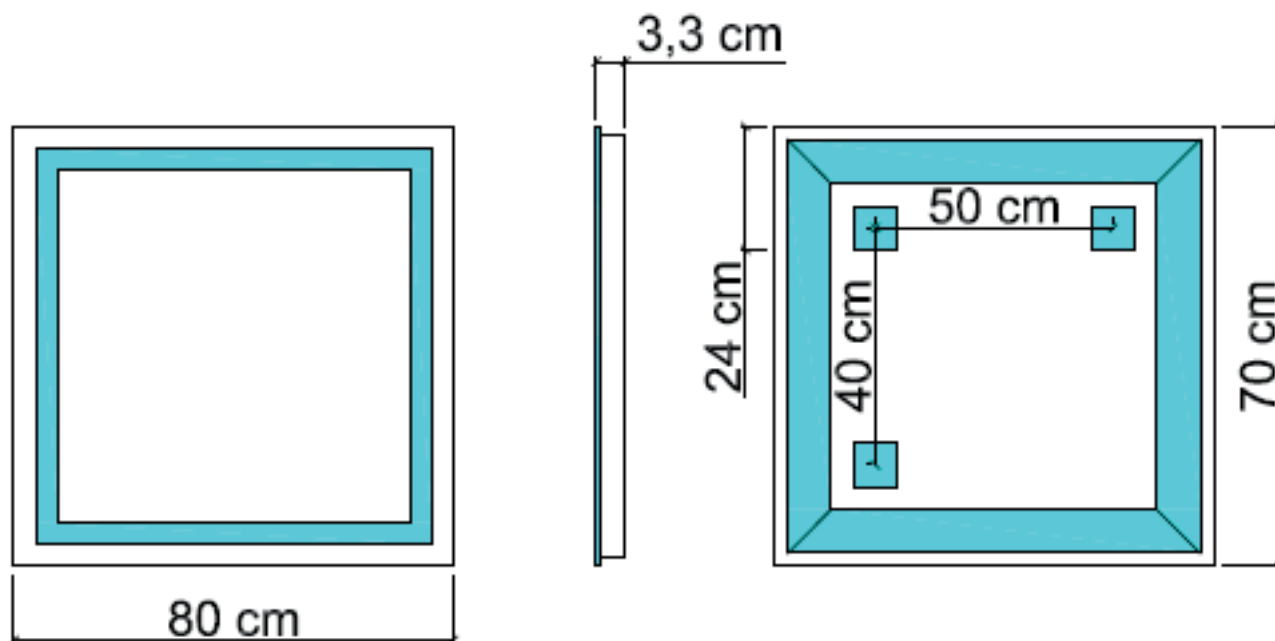

MIRROR WITH PERIMETRICAL LIGHT
art. L45982



TECHNICAL INFORMATION:

It can be mounted horizontally and vertically
The LED's assembled in Italy, are easily replaceable.
230V, ClassIII, IP44, LED on rigid support 1 x 57 WATT
3350 lumens of natural light color (> 4000K)
CE
Comply with the directives 2006/95 / EC and 2004/108 / EC in terms of electrical safety and electromagnetic compatibility


MATERIALS:

High-quality glass,
thickness 5 mm,
ecological production without lead and copper.
Structure of anodized aluminium

COMPATIBILITY ENERGY:



WARRANTY:

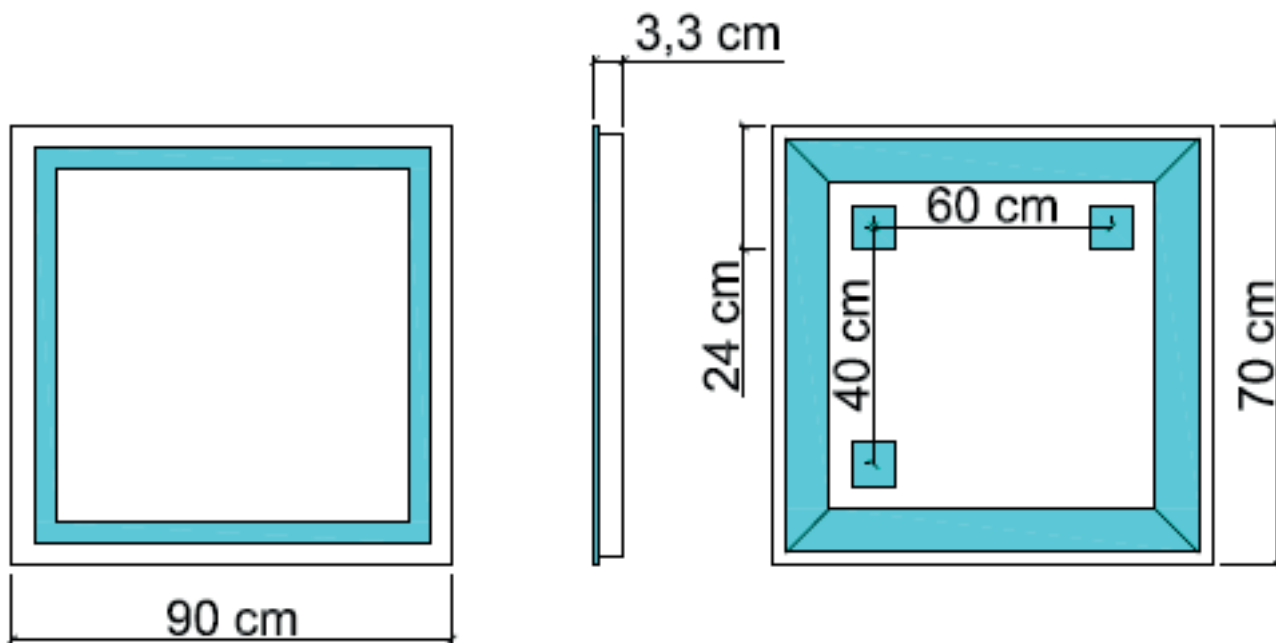

MIRROR WITH PERIMETRICAL LIGHT
art. L45983



TECHNICAL INFORMATION:

It can be mounted horizontally and vertically
The LED's assembled in Italy, are easily replaceable.
230V, Class III, IP44, LED on rigid support 1 x 61 WATT
3570 lumens of natural light color (> 4000K)
CE
Comply with the directives 2006/95 / EC and 2004/108 / EC in terms of electrical safety and electromagnetic compatibility

MATERIALS:

High-quality glass,
thickness 5 mm,
ecological production without lead and copper.
Structure of anodized aluminium

COMPATIBILITY ENERGY:



WARRANTY:

